

Telum™ 2001-VGA

High-Resolution CRT Video Graphics Controller for AdvancedMC™

Features

- Single-wide, full-height AdvancedMC complies with AMC.0 specification RC1.1
- Resolutions up to 1280 x 1024 at 60Hz with 24 bpp on a single display device
- 8MB embedded SGRAM memory 64 bits wide
- Standard high-density female DB15 CRT connector on front panel
- 3D and 2D hardware acceleration and BitBLT
- Carrier Grade Linux drivers available

Telum™ 2001-VGA provides a high-quality, high-performance graphics adapter for an AdvancedMC™ carrier board. It supports a variety of SVGA/CRT monitors in single-display configurations.

Designed to handle high-resolution graphics displays, this AdvancedMC has a Silicon Motion Lynx3DM8+ accelerator and 8MB of high-performance on-chip SGRAM. A comprehensive display mode supports many standard screen resolutions up to 1280 x 1024 at 60Hz with 24 bpp.

Telum 2001-VGA has a rich feature set that includes a complete 3D rendering suite, hardware support for MPEG/DVD playback, a robust 2D drawing engine that support ROPs, BitBLTs, transparent BLT, color expansion, and line draw. A front panel-mounted standard high-density DB15 socket is provided for SVGA/CRT output.

Telum 2001-VGA is ideal for board development applications that need video for debugging and monitoring.

Telum™ 2001-VGA High-Resolution CRT Video Graphics Controller for AdvancedMC™

Specifications

Form Factor

- Single-width, full-height AdvancedMC

AdvancedMC Interface

- PCI Express x1 link

AdvancedMC Conformance

- AMC.0 RC1.1

PCI Interface / Graphics Controller

- Silicon Motion Lynx3DM8+

Graphics Memory

- 8MB SGRAM 64 bits wide

Front Panel I/O

- Standard female DB15 CRT connector

Rear Panel I/O

- None

Dimensions

- 180.6 mm x 73.5 mm

Weight

- 0.058 kg (0.13 lb)

Power Requirements

- +12 VDC at 500mA typical

Environmental

- Operating temperature: 0° to +70° C
- Humidity: 5% to 95% non-condensing
- Storage temperature: -40° to +85° C


Standard CRT Resolutions Supported

- 640 x 480 x 8, 16, 24 bpp @ 60, 70, 85 Hz
- 800 x 600 x 8, 16, 24 bpp @ 60, 75, 85 Hz
- 1024 x 768 x 8, 16, 24 bpp @ 60, 75, 85 Hz
- 1280 x 1024 x 8, 16, 24 bpp @ 60 Hz

Regulatory Compliance

- FCC Part 15 Class A
- UL6095L-1
- CSA22.2 No. 60950-1
- CE Mark
- EN55022
- EN55024
- EN 60950-1

Block Diagram

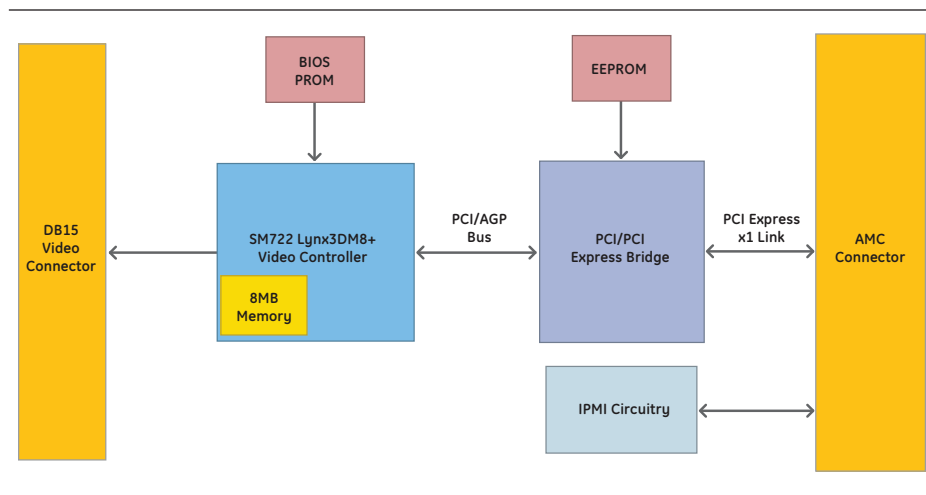

Ordering Information

72001-401: Telum 2001-VGA High-resolution CRT video graphics controller for AdvancedMC

About GE Fanuc Embedded Systems

GE Fanuc Embedded Systems is a leading global provider of embedded computing solutions for a wide range of industries and applications. Our comprehensive product offering includes many types of I/O, single board computers, high performance signal processors, fully integrated, rugged systems including flat panel displays, plus high speed networking and communications products. The company is headquartered in the U.S. and has design, manufacturing and support offices throughout the world. Whether you're looking for one of our standard products or a fully custom solution, GE Fanuc Embedded Systems has the breadth, experience and 24/7 support to deliver what you need. For more information, visit www.gefanucembedded.com.

GE Fanuc Embedded Systems Information Centers

Americas:
1 800 322 3616 or 1 256 880 0444

Asia Pacific:
86 10 6561 1561

Europe, Middle East and Africa:
+49 821 5034-0

Additional Resources

For more information, please visit the GE Fanuc Embedded Systems web site at:

www.gefanucembedded.com

